



CHK LET	REVISION	BY	CHK
A	REVISION 1 REWORK TO SATISFACTORY	DATE	APP

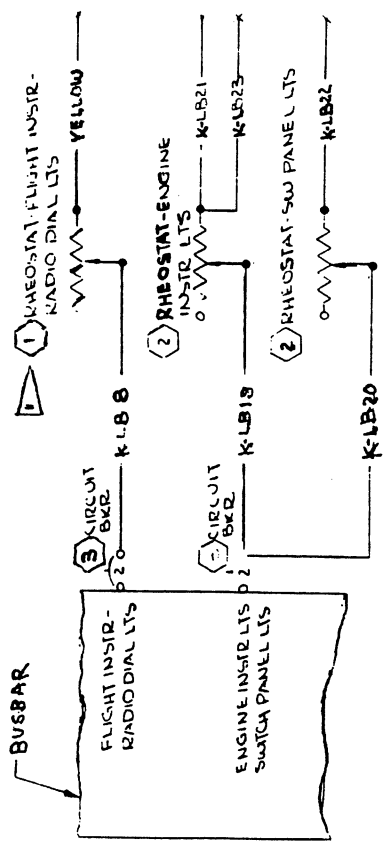

INACTIVE:  
 EFF THRU SER:  
 E 37014 & 2

NOTES:  
 1. THE RHEOSTAT TO BE USED FOR FLIGHT INSTRUMENT  
 RADIO DIAL LIGHTS IS TO BE DETERMINED ON  
 INSTALLATION (REF 1470007.)



LOOP NO	CA	MATERIAL	LG	TERMINALS	SERIALS
1	22	SWG 20	20	51000	
2	22	SOLDER	20	51000	
3	21	SOLDER	20	51000	
4	19	SOLDER	20	51000	
5	22	SOLDER	20	51000	

CESSNA AIRCRAFT CO. COMMERCIAL AIRCRAFT DIVISION WICHITA, KANSAS

WIRING DIAGRAM—  
POST LIGHT DIMMING  
RHEOSTATS  
(OPTIONAL)

MODEL: 337

REV: A

PAGE: 117

DATE: 11/75

NAME: [ ]

GROUP: [ ]

ENGINE: [ ]

PROJ: [ ]

OPERATED BY: [ ]

SUPERVISOR: [ ]

INSTALLATION NO: 1570000

QTY	PART NO	DESCRIPTION	INSTALLED ON
4	66953-001	INSTR CLUSTER	1513655
3	51840-2	CIRCUIT BREAKER	1470001
2	REWORKS	REWORK ENG INSTR. 1470007	
1	REWORKS	REWORK FLT INSTR. 1470007	